


Three - phase transformers

5.4 Type DTG 5 - 20 KVA in case IP 23

Corresponding to VDE 0550/ 0570

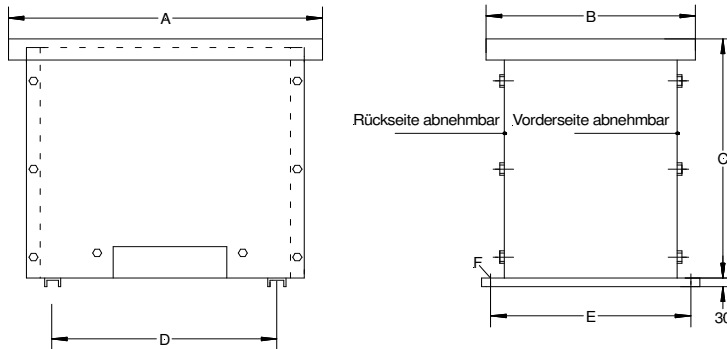

Construction:

Open transformer separate windings. Type protection IP 23.
 Corrosion protection via complete impregnation. Max. ambient temperature 40° C
 Insulation class „E“.

Type	Power KVA	Design size Core	Copper weight kg	Total weight kg	Dimensioning					
					A mm	B mm	C mm	D mm	E mm	F mm
DTG 5.00	5.00	3 UI 180	15.0	69.0	580	440	470	264	400	11x15
DTG 6.30	6.30	3 UI 180	18.0	78.0	580	440	470	264	400	11x15
DTG 8.00	8.00	3 UI 210	25.0	91.0	580	440	470	316	400	11x15
DTG 10.00	10.00	3 UI 210	26.0	92.0	580	440	470	316	400	11x15
DTG 12.50	12.50	3 UI 210	33.0	109.0	580	440	470	316	400	11x15
DTG 16.00	16.00	3 UI 210	38.0	133.0	580	440	470	316	400	11x15
DTG 20.00	20.00	3 UI 210	42.0	159.0	580	440	470	316	400	11x15