


Three – phase transformers

5.6 Type DLG 25 - 400 KVA in case IP 23

Corresponding to VDE 0532/ DIN EN 60076
VDE 0570/ DIN EN 61558

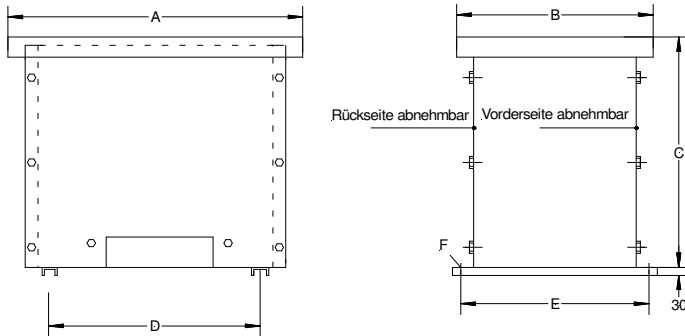

Construction:

Open transformer separate windings. Type protection IP 23. Insulation class „F“.
Corrosion protection via complete impregnation. Max. ambient temperature 40° C.
Power range up to 1000 KVA on request.

Type	Power	Design size	Copper Weight	Total weight	Case	Dimensioning					
						A	B	C	D	E	F
	KVA	Core	Kg	kg	Size	mm	mm	mm	mm	mm	mm
DLG 25.0	25.0	UI 390	48.0	168.0	150	740	510	560	356	460	11x15
DLG 31.5	31.5	UI 440	55.0	185.0	160	825	630	670	356	510	11x15
DLG 40.0	40.0	UI 440	56.0	215.0	160	825	630	670	400	510	11x15
DLG 50.0	50.0	UI 440	56.0	248.0	160	825	630	670	400	510	11x15
DLG 63.0	63.5	UI 550	87.0	323.0	170	1020	760	740	400	590	11x15
DLG 80.0	80.0	UI 550	98.0	383.0	170	1020	760	740	600	590	11x15
DLG 100.0	100.0	UI 550	120.0	453.0	180	1150	860	830	600	590	11x15
DLG 125.0	125.0	UI 580	206.0	573.0	180	1150	860	830	600	720	11x15
DLG 163.0	163.0	UI 580	225.0	668.0	180	1150	860	830	600	720	11x15
DLG 200.0	200.0	UI 820	220.0	878.0	250	1260	800	1150	765	760	11x15
DLG 250.0	250.0	UI 820	280.0	1041.0	250	1260	800	1150	765	760	11x15
DLG 315.0	315.0	UI 920	320.0	1266.0	250	1260	800	1150	900	760	11x15
DLG 400.0	400.0	UI 920	439.0	1502.0	250	1260	800	1150	900	760	11x15